

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Kirk C. Danzl et al.  
Filed : Herewith  
For : SYSTEM AND METHOD FOR  
REPORTING CALLS  
Docket No.: 021.12-0001

JC690 U.S. PTO  
09/441822

TRANSMITTAL LETTER

"Express Mail" mailing label number: **EL418980763US**  
Date of Deposit: **November 17, 1999**

The following paper(s) and/or fee(s) are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" addressed to BOX PATENT APPLICATION, Assistant Commissioner for Patents, Washington, D.C. 20231:

1. Our checks in the amount of \$760.00 and \$40.00
2. Fee Calculation Sheet (in duplicate)
3. Patent Application comprising the following pages:
  - 1 Abstract
  - 20 Specification
  - 10 Claims
4. 14 Sheets of drawings
5. Executed Declaration and Power of Attorney (3 pages)
6. Executed Assignment and Recordation Form Cover Sheet

Under 37 CFR § 1.136(a)(3), applicant(s) hereby authorize(s) for any future reply, the incorporation of any required petition for extension of time for the appropriate length of time and authorize the charging of fees under § 1.17 to deposit account 23-1123.

Respectfully submitted,

WESTMAN, CHAMPLIN & KELLY, P.A.

By:

*Joseph R. Kelly*  
Joseph R. Kelly, Reg. No. 34.847  
Suite 1600 - International Centre  
900 Second Avenue South  
Minneapolis, Minnesota 55402-3319  
Phone: (612) 334-3222  
Fax: (612) 334-3312

JRK:slg

Express Mail No. EL418980763US

PATENT APPLICATION OF

Kirk C. Danzl, Andrew Armstrong,  
and John Borowicz

ENTITLED

SYSTEM AND METHOD FOR REPORTING CALLS

Docket No. 021.12-0001

## SYSTEM AND METHOD FOR REPORTING CALLS

### REFERENCE TO PROVISIONAL APPLICATION

The present application hereby makes reference to and claims priority from Provisional Patent Application No. 60/108,731, filed November 17, 1998, entitled System and Method for Reporting Calls.

### BACKGROUND OF THE INVENTION

The present invention deals with call record reporting. More specifically, the present invention deals with arranging and reporting call record information to customers using, in some cases, geographically descriptive information.

Current telecommunications networks are capable of tracking and recording call transaction data, i.e., information associated with a given telephone call, and using this data to support call processing and to provide accurate billing information to customers. Systems have also been developed which strive to provide the customer with quite detailed call transaction data which the customer may use for specific purposes. U.S. Patent No. 5,425,087 to Gerber, for example, discloses a system that reports the length of each call, the length of time that a party was placed on hold, and the telephone number of the other party to a system administrator so that the telephone activities of employees can be monitored in real time.

U.S. Patent No. 5,754,634 to Kay, et al. discloses a system for tracking calls made to individual predetermined subscribers and automatically reporting information, including demographic breakdowns of calls, such as time of day, day of week, and location of origin, to the subscriber. The disclosed system makes use of the Advanced Intelligent Network (AIN) and

Integrated Service Control Point (ISCP) platform to provide such information to those subscribers desirous of such service. The ISCP captures the time and date of the call, the originating call number and the subscriber's call number. ISCP network data is collected for all calls placed to service subscribers by the AIN Data and Reports System (DRS). DRS is an operation support utility that provides service analysis on the collected data. The data may be sorted on the basis of called subscriber number and transmitted at periodic intervals to a report processor.

The call originating telephone number for each call may be used to access an existing telephone system billing database to obtain caller information, including zip code. The zip code, in turn, can be used to access a commercially available census database to provide further demographic information. For example, demographics for a given zip code may include median age and median income. Report statistics can match these demographics with a number of calls received as collected at the ISCP.

The calling party number may be supplied through Caller ID or AIN transmission. If this information is available only for calls within a telephone company Local Access and Transport Area (LATA), reports may include detailed breakdown of such calls while categorizing out of LATA calls in more general breakdowns. Detailed zip code results can include number and percentage of residential calls, business calls, homeowners, median income and age. Generalized information may include numbers, averages and percentages of calls in time ranges for days of the week.

The existing arrangements have some drawbacks. In the existing arrangements, a zip code cannot be attached to certain calls. For example, because a telephone company has no billing records for telephone numbers outside of its LATA, it cannot attach a zip code to long distance calls. Further, under the existing arrangement, there is no way to attach a geographical indicator to a call without a zip code. Thus, for many calls, no geographical indicator can be attached. Furthermore, even for calls for which a zip code is attached, there is no indication of an actual geographic location. All the subscriber receives is a zip code. Another drawback of the existing arrangements is that the report that is output to the subscriber is only available in tabular form, which tends to be rather cryptic. Thus, it is difficult and inconvenient for the subscriber to comprehend and absorb the information contained in the tables.

#### SUMMARY OF THE INVENTION

The present invention can be configured to provide one or more of a variety of advantages. Among the advantages are the flexibility and convenience that it affords the subscriber in choosing the output format in which to view the call data reports. The subscriber has the option of viewing the information in the form of tables, graphs or maps of a multitude of different formats. Particularly advantageous are the various map report formats, which allow the subscriber to easily visualize and digest the information provided by the system. Another advantage of the present invention is its ability to attach a geographical location to calling parties for whom a corresponding zip code is not available. Yet another advantage of the present invention is that it verifies the validity of the call

transaction data before proceeding with the processing of the data.

The present invention is a system and method for processing and reporting telephone records. The  
5 system first receives call transaction data from a telephone company. The system verifies the validity of the data before proceeding with processing the data. Next the data is geocoded so that the calls can be traced to a given location. A report generator then  
10 uses the call detail data to generate reports relating to the call detail data.

The report generator may be operated by the provider of the service embodying the present invention, or may be operated by the subscriber to the service on  
15 the subscriber's own computer, depending on the preference of the subscriber. Where the service provider generates the reports, a paper copy of the reports in formats selected by the subscriber is delivered to the subscriber. If the subscriber elects  
20 to generate the reports, the call detail data is delivered to the subscriber via means selected by the subscriber, illustratively via a computer network or on diskette. The report generator produces tables, graphs, and maps which are useful to the subscriber. When  
25 generating maps, the report generator uses the geocoded information to geographically locate given calls on a map.

The subscriber may use generated reports to do detailed marketing research. For example, the  
30 subscriber can determine from which geographical areas the greatest response was received following, for example, a given television advertisement and adjust its advertising strategy accordingly. The subscriber may also use the generated reports to assist in staffing

decisions. For example, the subscriber can determine when during the day, and on which lines, incoming calls were unanswered or met with busy signals.

BRIEF DESCRIPTION OF THE DRAWINGS

5           FIG. 1 is a high level block diagram of a system utilizing the present invention.

          FIG. 2 is a functional block diagram illustrating one embodiment of telephone company call processing.

10           FIG. 3 is an example of a call record, which is provided by the telephone company for processing by the present invention.

          FIG. 4 is a functional block diagram illustrating one embodiment of call processing according to the present invention.

15           FIG. 5 is a functional block diagram illustrating one embodiment of end-of-cycle processing according to the present invention.

          FIG. 6 is a functional block diagram illustrating one embodiment of web report distribution according to the present invention.

20           FIG. 7 is a functional block diagram illustrating one embodiment of diskette report distribution according to the present invention.

25           FIG. 8 is a table exemplifying call detail data that may be produced according to the present invention.

          Table 1 demonstrates the geocoding logic hierarchy according to the present invention.

30           Appendix A contains an exemplary view of a computer screen that may be generated according to the present invention.

Appendix B contains an exemplary view of a computer screen that may be generated according to the present invention.

5 Appendix C contains an exemplary view of a computer screen that may be generated according to the present invention.

Appendix D contains a table exemplifying a report that may be generated by the report generator according to the present invention.

10 Appendix E contains a graph exemplifying a report that may be generated by the report generator according to the present invention.

15 Appendix F contains a map exemplifying a report that may be generated by the report generator according to the present invention.

Appendix G contains a map exemplifying a report that may be generated by the report generator according to the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 FIG. 1 provides an overview of the system of the present invention. FIG. 1 shows in block diagram form, telephone company 10, service provider 14, and customer 26. In block 10, the telephone company captures and processes call transaction data for a  
25 customer who subscribes to a reporting service employing the system of the present invention. In block 12, the telephone company transmits the call records, via a global computer network (such as the Internet) or other appropriate means, to the provider of the service  
30 embodied in the present invention.

In block 14, the service provider processes the call records received from the telephone company. In order to do this, a number of functions are performed. The functions are illustrated by blocks in



service provider call processing block 14, and can be performed by any suitable, computer-based systems. In block 16, the system converts the call record data into a format that is compatible with the system's geocoding software and report-generating software. Also in block 5 16, the call records are matched to the subscriber. In block 18, the system audits and verifies the validity of the data. In block 20, the system geocodes the call data. Thus, for each call, the system attaches a geographic longitude and latitude corresponding to the location of the second party to the call (the subscriber being the first party to the call). In block 22, the call records and the geocoded data are packaged into a call detail file. In block 24, the call detail data is 10 delivered to the subscriber in a suitable way, such as via the Internet, on floppy disk or in paper form.

Block 26 illustrates that the call detail data is fed into a report generator which outputs a report in a format selected by the subscriber. The report generator is run by the subscriber on the subscriber's own computer (unless the subscriber opts for paper delivery, in which case the service provider generates the report). The available report formats include a variety of tables, graphs and maps. If the subscriber 20 selects the map format, the report generator overlays the geocoded data on a map so that the subscriber can see on the map exactly where calls were placed to or received from along with various other information regarding those calls.

FIG. 2 provides an illustrative example of the call processing performed by the telephone company as shown in block 10 of FIG. 1. It should be noted that different telephone companies will process their call records in different ways. The present invention is 30

capable of adjusting to the particular processing method employed by a given telephone company. It should also be noted that different telephone companies will transmit their call records to the service provider at  
5 different points along the chain illustrated in FIG. 2.

In FIG. 2, at its various switches 28, the telephone company captures call transaction data off of the Advanced Intelligent Network (AIN) and places the data in AIN call files 30 of two types: call attempt  
10 files and completed call files. The call attempt files contain call transaction data for all attempted calls, while the completed call files contain call transaction data only for calls that were answered. Call transaction data can include the time, date and duration  
15 of the call, the originating call number, the terminating call number, and call status (busy, answered or unanswered). Because the present invention can be used with both outgoing and incoming calls, the subscriber's line number may be either the originating  
20 or the terminating call number. The telephone company then combines the AIN call files from its various switches into a single call attempt file and a single completed call file, as shown in block 32.

In block 34, the billing records, including  
25 billing telephone number (BTN) and zip code, of the second party to each call are added to the call transaction data files. Billing records may not be available for some calls (long distance calls, for instance). In this illustrative embodiment, the step  
30 embodied in block 34 is performed by the telephone company. However, the present invention is also capable of performing this step, as well as all subsequent steps.

Next, the AIN call attempt file 36 and the AIN completed call file 38 are combined to form one complete call record file, as shown in block 40. This call record file is then transmitted to the service provider by sending it to the service provider's FTP (File Transfer Protocol) server 42, or other appropriate means. In one illustrative embodiment, the telephone company will transmit the call record data to the service provider at least daily.

FIG. 3 is a printout of a sample single call record 44 that might be transmitted from the telephone company to the service provider. Some of the significant fields include the subscriber billing telephone number 46, the number of the subscriber's line 48 used for the call, the time 50 and date 52 of the call, the line number of the call party 54, the zip code of the calling party 56, call type 58 and duration 60. Different telephone companies may transmit call records of varying formats. For instance, the call type field 58 of one telephone company might indicate whether the call was answered, unanswered or met with a busy signal, while for a different telephone company might indicate whether the call was incoming or outgoing. Also, the subscriber has the option of receiving records for incoming calls, outgoing calls or both, and the call record will vary accordingly.

FIG. 4 provides a detailed breakdown of the call processing performed by the service provider as shown in block 14 of FIG. 1. The service provider receives the call record files from the telephone company by any appropriate means. In FIG. 4, the service provider receives the call record data at its secured FTP server 42, as shown in block 62. In block 64, the FTP server is scanned for files received. Also

in block 64, when raw files 66 are received, they are transferred, in one illustrative embodiment, to a local area network processing server.

5 In block 68, the validity of the call record data 66 is checked. The system searches for anomalies in the data by performing statistical analysis to determine if certain variables fall within established parameters. Examples of variables that are analyzed include the number of calls received, the number of busy  
10 calls received and the number of calls for which the status is unknown in a given time period. The system may also check to ensure that calls were received during all hours of the day to determine whether data transmission problems were encountered during any time  
15 of the day, or to determine whether the system was temporarily down during any part of the day. The current data is compared to collected statistical data to determine if the current data is generally in line with the collected data. The parameters will vary from  
20 one subscriber to another. For example, for one subscriber it may be acceptable for five percent of its calls to be of unknown status, while for another subscriber, one percent may be the highest acceptable percentage of calls of unknown status. The system  
25 adjusts the parameters over time and for new situations as new statistical data is collected. The validity check is performed at the overall level, as well as the individual subscriber level. For example, at the overall level, the system compares the newly received  
30 files 66, in the aggregate against the statistical data maintained for aggregate files. Then, the same types of checks are performed on the individual customer basis. If the call record data is deemed invalid, it is kicked out of the system and not processed further, as shown in

block 70. If the data is deemed valid, processing continues at block 72.

In block 72, the system verifies that the subscriber's account was active when the particular call  
5 was placed. If the account was terminated or not yet active, the data is not processed, as shown in block 74. In block 76, the call record data is converted into a format that is compatible with the service provider's geocoding software and report-generating software. Also  
10 in block 76, the call records are matched to the subscriber. In some cases, the telephone company will provide the customer number as part of the call record data. When that is the case, the system looks up the customer records in both a customer master file 78 and  
15 a line cross-reference file (line xref) 80. The customer master file contains customer information (related to a given customer number) collected during an initial set-up procedure in which the customer's account is initialized. The cross-reference file 80 contains a  
20 cross-reference between particular telephone line numbers and customer numbers. If the customer number is not in the customer master file 78 and the line number is not in the line cross-reference file 80, the call record is placed in a spin file for a suitable period of  
25 time (such as one month) and processing is re-tried at that time, as shown in block 82.

If the telephone company does not provide the customer number, the system looks up the customer number in the line cross-reference file 80. If the line number  
30 is not in the line cross-reference file 80, again the call record is placed in the spin file for one month, as shown in block 82. Thus the output of block 72 is a good call record file in the service provider's format  
84.

In block 86, the call record data is geocoded. The geocoding process attaches to each call the precise longitude and latitude of the geographic centroid, or geographic center, of either the zip (postal) code, area code or exchange code of the second party to the call. Five geographic databases 88 are maintained, one each for nine-digit zip codes, five-digit zip codes, three-digit zip codes, area codes, and exchange codes. Each database contains the precise longitude and latitude of the geographic centroid for each respective zip, area and exchange code. Table 1 illustrates the geocoding hierarchy.

In case 1, a nine-digit zip code exists in the call record's zip code field. If the same nine-digit zip code exists in the nine-digit zip code database, the longitude and latitude corresponding to that zip code are attached to that call. If the nine-digit zip code is not contained in the nine-digit database, the system looks in the five-digit zip code database for the first five digits of the nine-digit zip code. If that five digit zip code is present, the corresponding longitude and latitude are attached to the call. If the first five digits are not in the five-digit database, the three-digit database is searched for the first three digits of the nine-digit zip code. The three-digit database may be useful, for instance, for new zip codes which are not yet cataloged in the five-digit database. If the first three digits do not exist in the three-digit database, the system searches the exchange code database (designated npanxx DB in Table 1) for the first six digits (designated npanxx) of the line number of the second party to the call (i.e., the area code and exchange). The exchange code database contains data corresponding to particular exchange codes within

particular area codes. An exchange code consists of the first three digits of a telephone number after the area code. Thus, if a match is found in the exchange code database, the longitude and latitude corresponding to the geographic centroid corresponding to the identified area code and exchange are attached to the call record. If no match is found in the exchange code database, the area code database (designated nap DB in Table 1) is searched for the area code (designated npa) of the line number. If that is unsuccessful, a special longitude/latitude value indicating unknown origin is attached to the call.

In case 3, a five-digit zip code is provided in the zip code field. If a five-digit zip code exists in the call record's zip code field, a protocol similar to the above is used as shown in Table 1, beginning with a search of the five-digit zip DB and continuing on as described with respect to case 1.

As can be seen in cases 2, 4 and 5, Table 1, if less than five or between five and nine (i.e., six, seven or eight) digits exist in the call record's zip code field, the system presumes that the data is invalid and uses only the line number in geocoding that call as described with respect to case 1.

The system also assigns a value, shown in the far right-hand column of Table 1, to the longitude and latitude specification based on its precision. For example, when the nine-digit zip code database is used to determine the longitude and latitude, a more accurate approximation of the location of the second party to the call is obtained than if the five-digit or three-digit databases are used. The assigned value reflects this degree of accuracy. The assigned value can also be used to indicate the reliability of the data. For example,

in cases 2 and 4, it is presumed that the zip code field in the call record contains bad data. There is then an increased probability that other data in the record, including the line number, is also unreliable. The  
5 assigned value reflects this reduced level of reliability.

The description now continues with respect to FIG. 4. In block 86, the customer accumulator and line accumulator are also updated. The accumulators tally  
10 the number of call records processed during the current cycle for each line and for each subscriber. Cycles are illustratively weekly or monthly. The output of block 86 is the call detail data 90 which is the aggregate of the call record data 84 and the corresponding geocoded  
15 data. The call detail records 90 are accumulated until the end of the cycle, at which time they are prepared for distribution to the subscriber. The call detail records are also stored in the customer balance and line balance databases 92, which are used in the validity  
20 checks of block 68 and against which statistical analysis is performed.

FIG. 5 illustrates the processing of the call detail records which takes place at the end of each cycle. The system first obtains the identity of a  
25 customer for which a cycle has ended and to which call detail records must be reported. This is indicated by block 93. In block 94, the system checks whether records have been processed for the given line or given subscriber (depending on whether calls are to be  
30 processed for all of the subscriber's lines or for just a given line) during the current cycle. If records have been processed, the call detail records 90 are collected as shown in block 96. In block 98, the system checks whether the number of call detail records 90 is equal to



the value held in the accumulator 100. If it is not, there may be a problem with the call detail records 90 and the process is halted, as shown in block 102. If the accumulator 100 agrees with the call detail records, the calls are sorted as indicated by block 104 and cycle processing commences as indicated in block 106.

In block 108, a customer delivery summary file 110 is created. This file contains information regarding the subscriber's delivery preferences. This file is created using information obtained from the customer master file 78 and line cross-reference file 80. In block 112, a marketing message file 114 is created. The marketing message represented in the marketing message file may, for instance, be a logo, company name or other message and will later be placed on the output reports. This message is typically created by the telephone company. The customer delivery summary file 110 and customer message file 114 are then merged into a single summary/message file 116, which is used to determine whether the reports will be delivered to the subscriber in paper form, on floppy disk, or via the Internet or other suitable mechanism as shown in block 118.

The report data can be delivered to the subscriber by any of a variety of methods. The subscriber chooses the delivery method. The three basic delivery methods described herein are the Internet, diskette and paper. Of course, other transmission methods may be used as well, such as by direct dial-up connection, wireless connection, etc.

The Internet and diskette distribution methods are illustrated in FIGS. 6 and 7, respectively. FIGS. 6 and 7 correspond to block 26 in FIG. 1. In both methods, first a file is created in an electronic

reporting format, such as a .PDF (paper document format) file, as shown in block 120. Then a self-extracting .exe (executable) file is created, as shown in block 122. For web distribution, the files are then copied to the service provider's Internet server delivery directory, as shown in block 124. In block 126, the service provider's web page is updated to make the new files available to the subscriber. The subscriber can then retrieve the files at the service provider's web site. Illustratively, for diskette distribution, after the .PDF and .exe files are created, they are copied to the customer service delivery directory, as shown in block 128. The files are then copied to floppy disk 130 and delivered to the subscriber.

15           If the subscriber takes the paper delivery option, the service provider creates an ASCII printstream file and a .exe file. The service provider then generates the report according to the subscriber's instructions and delivers a paper copy to the subscriber.

20           Subscribers who choose web or diskette delivery are also illustratively provided with report-generating software, which they run on their own computer. The subscriber uses the report generating software to process the delivered data files, including the call detail data 90, and generate reports relating to the call detail data. The subscriber may, if desired, view the raw call detail data 90, a sample of which is provided in FIG. 8. The particular embodiment of call detail data illustrated in FIG. 8 includes the following fields: call date 132, call time 134, destination number 136, calling party number 138, call type 140 (incoming, outgoing), call disposition 142, call status 144, call duration 146 (in tenths of

seconds), calling party name 148, postal (zip) code 150 of the calling party, longitude 152 and latitude 154 of the calling party, and the value 156 assigned to the longitude/latitude specification. The call disposition  
5 (disp) 142 and call status (stat) 144 fields work together to encode information about the call. For example, if call stat = 1 and call disp = 0, the call was answered. If call stat = 0 and call disp = 2, the line was busy. If call stat = 0 and call disp = 3, the  
10 call was not answered. Other items can be encoded as well.

The report generator is capable of producing multitudes of different reports in three basic formats: table, graph or map. Appendix A is illustrative of a  
15 main screen which a user of the report generator software would first encounter. A quick summary 158 provides a brief synopsis of the call detail data. In report period box 160, the user can select the dates for which a given report or set of reports should be  
20 generated. Clicking on the "Change Dates" button 162 with a mouse pulls up a calendar, an illustrative example of which is provided in Appendix B. The user clicks on the dates on the calendar to select the report period. The user is not limited to viewing data from  
25 the most recent time period. Rather, data from previous time periods may also be included in the reports.

In the report set selection box 164 the user selects which reports should be generated. The user can choose among predefined sets of reports, determined by  
30 the service provider. These predefined report sets lump together various reports that may be useful for a specific purpose such as marketing or staffing, for example.

By clicking on the "customize report set" button 166, the user can also customize a report set so that each time the software is run, a predefined set of reports, selected by the user, will be generated.

5 Clicking on the "customize report set" button pulls up a menu such as the one illustrated in Appendix C. The menu in Appendix C lists a variety of tables, graphs and maps. Other menus listing various other tables, graphs and maps can be accessed by clicking on the various  
10 buttons above the menu. To select which reports should be generated, the user clicks on the boxes 170 corresponding to the desired reports. In box 172, the user can select whether to have reports generated for incoming calls, outgoing calls, or both. At circle 174,  
15 the user can select to have reports generated for all of its lines, for a particular line, or for a selected group of lines.

Referring again to Appendix A, to view the selected reports, the user clicks on the "view reports" button 176. Appendix D provides an example of a table  
20 generated by the system. The table lists all of the zip codes from which calls were received in the given time period for the first time, and ranks them in terms of number of calls. Such information may be useful in  
25 developing and analyzing marketing and advertising strategies. The data in this table could also be presented in graph form, as could the data from any generated table.

Appendix E provides an example of a graph  
30 generated by the system. The graph shows the quantity of the various call types (answered, busy, unanswered, unknown) received during each hour for the given day. Such information may be useful in making staffing decisions. Of course, the system can also be configured

to suggest answers to such decisions. For example, the system can be programmed with any desired staffing or business parameters (such as a number of calls which can be serviced by an individual, and a maximum desired number of unanswered calls). With that information, the system can analyze the collected information and make recommendations, such as "Add an operator from 10:00 am to 1:00 pm on Thursdays" or "You average 20 unanswered calls between 6:00 am and 8:00 am. Modify store hours to accommodate incoming calls as early as 6:00 am." Any other desired parameters and recommendations can be implemented as well.

Some of the other tables and graphs that may be generated by the system include various information regarding, for example, top callers, top zip codes, new callers, call duration, unanswered calls and busy signals. Of course, all of this data can be reported for either incoming calls, outgoing calls, or both.

Many reports can also be generated in map form. Appendix F provides an example of a map generated by the system. The map indicates the zip codes from which the most calls were received by color-coding each zip code according to the quantity of calls.

The software can place each call or caller on a map at its precise geocoded longitude and latitude. Appendix G provides an example of a map that utilizes geocoded information. The map shows all incoming calls for the stated time period and indicates which day they were placed using color-coding. A square is placed for each call at the exact longitude and latitude determined by the geocoding process of block 86 in FIG. 4. Using geocoded data, the system can also map the location of, for example, top callers, new callers, unanswered calls and calls that received a busy signal.

Although the present invention has been described with reference to preferred embodiments, workers skilled in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of the invention.

5

10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100  
105  
110  
115  
120  
125  
130  
135  
140  
145  
150  
155  
160  
165  
170  
175  
180  
185  
190  
195  
200  
205  
210  
215  
220  
225  
230  
235  
240  
245  
250  
255  
260  
265  
270  
275  
280  
285  
290  
295  
300  
305  
310  
315  
320  
325  
330  
335  
340  
345  
350  
355  
360  
365  
370  
375  
380  
385  
390  
395  
400  
405  
410  
415  
420  
425  
430  
435  
440  
445  
450  
455  
460  
465  
470  
475  
480  
485  
490  
495  
500  
505  
510  
515  
520  
525  
530  
535  
540  
545  
550  
555  
560  
565  
570  
575  
580  
585  
590  
595  
600  
605  
610  
615  
620  
625  
630  
635  
640  
645  
650  
655  
660  
665  
670  
675  
680  
685  
690  
695  
700  
705  
710  
715  
720  
725  
730  
735  
740  
745  
750  
755  
760  
765  
770  
775  
780  
785  
790  
795  
800  
805  
810  
815  
820  
825  
830  
835  
840  
845  
850  
855  
860  
865  
870  
875  
880  
885  
890  
895  
900  
905  
910  
915  
920  
925  
930  
935  
940  
945  
950  
955  
960  
965  
970  
975  
980  
985  
990  
995

WHAT IS CLAIMED IS:

1. A method for reporting calls having associated call transaction data, the calls being from a call originator to a call recipient the method comprising the steps of:

accessing the call transaction data;  
determining an approximate longitude and latitude of the call originator for each call using the call transaction data;  
and  
storing the approximate longitude and latitude.

2. The method of claim 1 and further comprising:  
generating a statistical report related to the call transaction data and including the approximate longitude and latitude of the call originator for each call.

3. The method of claim 2 wherein the call transaction data for a given call includes a postal code of the call originator for the given call and wherein determining an approximate longitude and latitude comprises using the postal code to obtain the approximate longitude and latitude of the call originator.

4. The method of claim 3 wherein the determining step comprises correlating the postal code with the longitude and latitude of a geographic centroid of an area defined by the postal code.

5. The method of claim 1 wherein the call transaction data includes an area code of a telephone

line number of the call originator and wherein the determining step comprises using the area code of the telephone line number of the call originator to obtain the approximate longitude and latitude.

6. The method of claim 5 wherein the determining step comprises correlating the area code with the longitude and latitude of a geographic centroid of an area defined by the area code.

7. The method of claim 1 wherein the call transaction data comprises an area code and exchange code of a telephone line number of the call originator and wherein the determining step comprises using the area code and exchange code of the telephone line number of the call originator to obtain the appropriate longitude and latitude.

8. The method of claim 5 wherein the determining step comprises correlating the area code and exchange code with the longitude and latitude of a geographic centroid of an area defined by the area code and exchange code.

9. The method of claim 1 further comprising providing a map including the approximate longitude and latitude of the second party to a call.

10. The method of claim 1 wherein the call transaction data includes a postal code of the call originator, the method further comprising obtaining a nine-digit database including a plurality of approximate longitudes and latitudes, each corresponding to a particular nine-digit postal code, and obtaining a five-



digit database including a plurality of approximate longitudes and latitudes, each corresponding to a particular five-digit postal code, and the determining step further comprising:

if the postal code is contained in the nine-digit database, assigning the corresponding longitude and latitude from the nine digit database to the call; and

if the postal code is not contained in the nine-digit database, but a first five digits of the postal code are contained in the five-digit database, assigning the corresponding longitude and latitude from the five digit database to the call.

11. The method of claim 10 further comprising obtaining a three-digit database including a plurality of approximate longitudes and latitudes, each corresponding to a particular three-digit postal code, the determining step further comprising:

if the postal code is not contained in the nine-digit database or the five-digit database, but the first three digits of the postal code are contained in the three-digit database, assigning the corresponding longitude and latitude from the three digit database to the call.

12. The method of claim 11 wherein the call transaction data includes a telephone line number of the call originator and further comprising obtaining an

exchange code database including a plurality of approximate longitudes and latitudes, each corresponding to a particular area code and exchange code, and the determining step further comprising:

if the postal code is not contained in the nine-digit database, the first five digits of the postal code are not contained in the five-digit database, and the first three digits of the postal code are not contained in the three-digit database, but the first six digits of the telephone line number are contained in the exchange code database, assigning the corresponding longitude and latitude from the exchange code database to the call.

13. The method of claim 12, further comprising obtaining an area code database including a plurality of approximate longitudes and latitudes, each corresponding to a particular area code, and the determining step further comprising:

if the postal code is not contained in the nine-digit database, the first five digits of the postal code are not contained in the five-digit database, the first three digits of the postal code are not contained in the three-digit database, and the first six digits of the telephone line number are not contained in the exchange code database, but the first three digits of the telephone line number are contained in the area code database, assigning the

corresponding longitude and latitude from the area code database to the call.

14. The method of claim 13, the determining step further comprising:

if the postal code is not contained in the nine-digit database, the first five digits of the postal code are not contained in the five-digit database, the first three digits of the postal code are not contained in the three-digit database, and the first six digits of the telephone line number are not contained in the exchange code database, and the first three digits of the line number are not contained in the area code database, assigning a special longitude and latitude, indicating unknown origin, to the call.

15. The method of claim 1 wherein the call transaction data includes a postal code of the call originator and a telephone line number of the call originator, the postal code containing one of fewer than five digits, between five and nine digits, or more than nine digits, the method further comprising obtaining an exchange code database including a plurality of approximate longitudes and latitudes, each corresponding to a particular area code and exchange code, and obtaining an area code database including a plurality of approximate longitudes and latitudes, each corresponding to a particular area code, and the determining step further comprising:

if the first six digits of the telephone line number are contained in the exchange code database, assigning the corresponding longitude and latitude from the exchange code database to the call; and

if the first six digits of the line number are not contained in the exchange code database, but the first three digits of the line number are contained in the area code database, assigning the corresponding longitude and latitude from the area code database to the call.

16. The method of claim 15, the determining step further comprising:

if the first six digits of the telephone line number are not contained in the exchange code database, and the first three digits of the line number are not contained in the area code database, assigning a special longitude and latitude, indicating unknown origin, to the call.

17. The method as in any of claim 1, further comprising:

assigning a value to the assigned longitude and latitude, the value indicating a degree of accuracy of the assigned longitude and latitude.

18. A method for reporting call records of calls having associated call transaction data, the method comprising the steps of:

- accessing the call transaction data;
- verifying the validity of the call transaction data; and
- if the call transaction data is valid, generating a statistical report related to the call transaction data.

19. The method of claim 18 wherein the call transaction data is identifiable to one of a plurality of call originators and wherein the statistical reports are generated for a report requestor requesting a report for a predefined set of telephone line numbers and wherein the verifying step is performed with respect to the call transaction data for each particular report requestor.

20. The method of claim 19 wherein the verifying step is performed with respect to aggregated call transaction data.

21. The method of claim 17 wherein the verifying step comprises:

- performing statistical analysis to determine whether certain variables fall within established parameters.

22. The method of claim 21 wherein the parameters are established using previously collected statistical call transaction data.

23. The method of claim 22 wherein the established parameters are adjusted over time as additional statistical call transaction data is collected.

24. The method of claim 21 wherein the established parameters vary from one call report requestor to another.

25. The method of claim 21 wherein the variables comprise the number of calls placed or received in a particular time period.

26. A method of reporting local call records for calls having associated call transaction data, the method comprising the steps of:

accessing the call transaction data;  
processing the call transaction data; and  
generating a statistical report related to the call transaction data and according to one of a plurality of selectable report formats.

27. The method of claim 26 wherein the plurality of selectable report formats comprises a plurality of selectable table formats.

28. The method of claim 27 wherein the plurality of selectable table formats comprises tables providing information relating to at least one of most frequently called line numbers, most frequently called postal codes, most frequent callers, most frequently called-from postal codes, new callers, newly-called line numbers, call duration, unanswered calls and busy signals.

29. The method of claim 26 wherein the plurality of selectable report formats comprises a plurality of selectable graph formats.

30. The method of claim 29 wherein the plurality of selectable graph formats comprises graphs providing information relating to at least one of most frequently called line numbers, most frequently called postal codes, most frequent callers, most frequently called-from postal codes, new callers, newly-called line numbers, call duration, unanswered calls and busy signals.

31. The method of claim 26 wherein the plurality of selectable report formats comprises a plurality of selectable map formats.

32. The method of claim 31 wherein the plurality of selectable map formats comprises maps providing information relating to at least one of most frequently called line numbers, most frequently called postal codes, most frequent callers, most frequently called-from postal codes, new callers, newly-called line numbers, call duration, unanswered calls and busy signals.

33. The method of claim 31 wherein the plurality of selectable map formats comprises maps indicating an approximate geographic location of a call originator.

34. The method of claim 31 wherein the plurality of selectable map formats comprise maps having boundaries automatically generated based on the call transaction data.

35. A method for reporting calls having associated call transaction data, the calls being from a call originator to a call recipient the method comprising the steps of:

- accessing the call transaction data;
- determining an approximate geographical reference related to each call reflected in the call transaction data; and
- displaying a plurality of variable telecommunication transaction attributes associated with each call and correlated to the geographical reference for each call.

11/11/2011 11:11:11 AM



**SYSTEM AND METHOD FOR REPORTING CALLS**

**ABSTRACT OF THE DISCLOSURE**

A system and method is provided for reporting calls. The system first receives call transaction data from a telephone company. The system verifies the validity of the data before proceeding with processing the data. Next the data is geocoded so that the calls can be traced to a given location. The resultant call detail data is then transmitted to parties who have subscribed to the service. A report generator uses the call detail data to generate tables, graphs, and maps which are useful to the subscriber. When generating maps, the report generator uses the geocoded information to geographically locate given calls on a map.

1. A system for reporting calls, comprising:  
a. a data receiver for receiving call transaction data from a telephone company;  
b. a data verifier for verifying the validity of the data before proceeding with processing the data;  
c. a geocoder for geocoding the data so that the calls can be traced to a given location;  
d. a transmitter for transmitting the resultant call detail data to parties who have subscribed to the service;  
e. a report generator for using the call detail data to generate tables, graphs, and maps which are useful to the subscriber;  
f. a map generator for using the geocoded information to geographically locate given calls on a map.

Call Data Flow

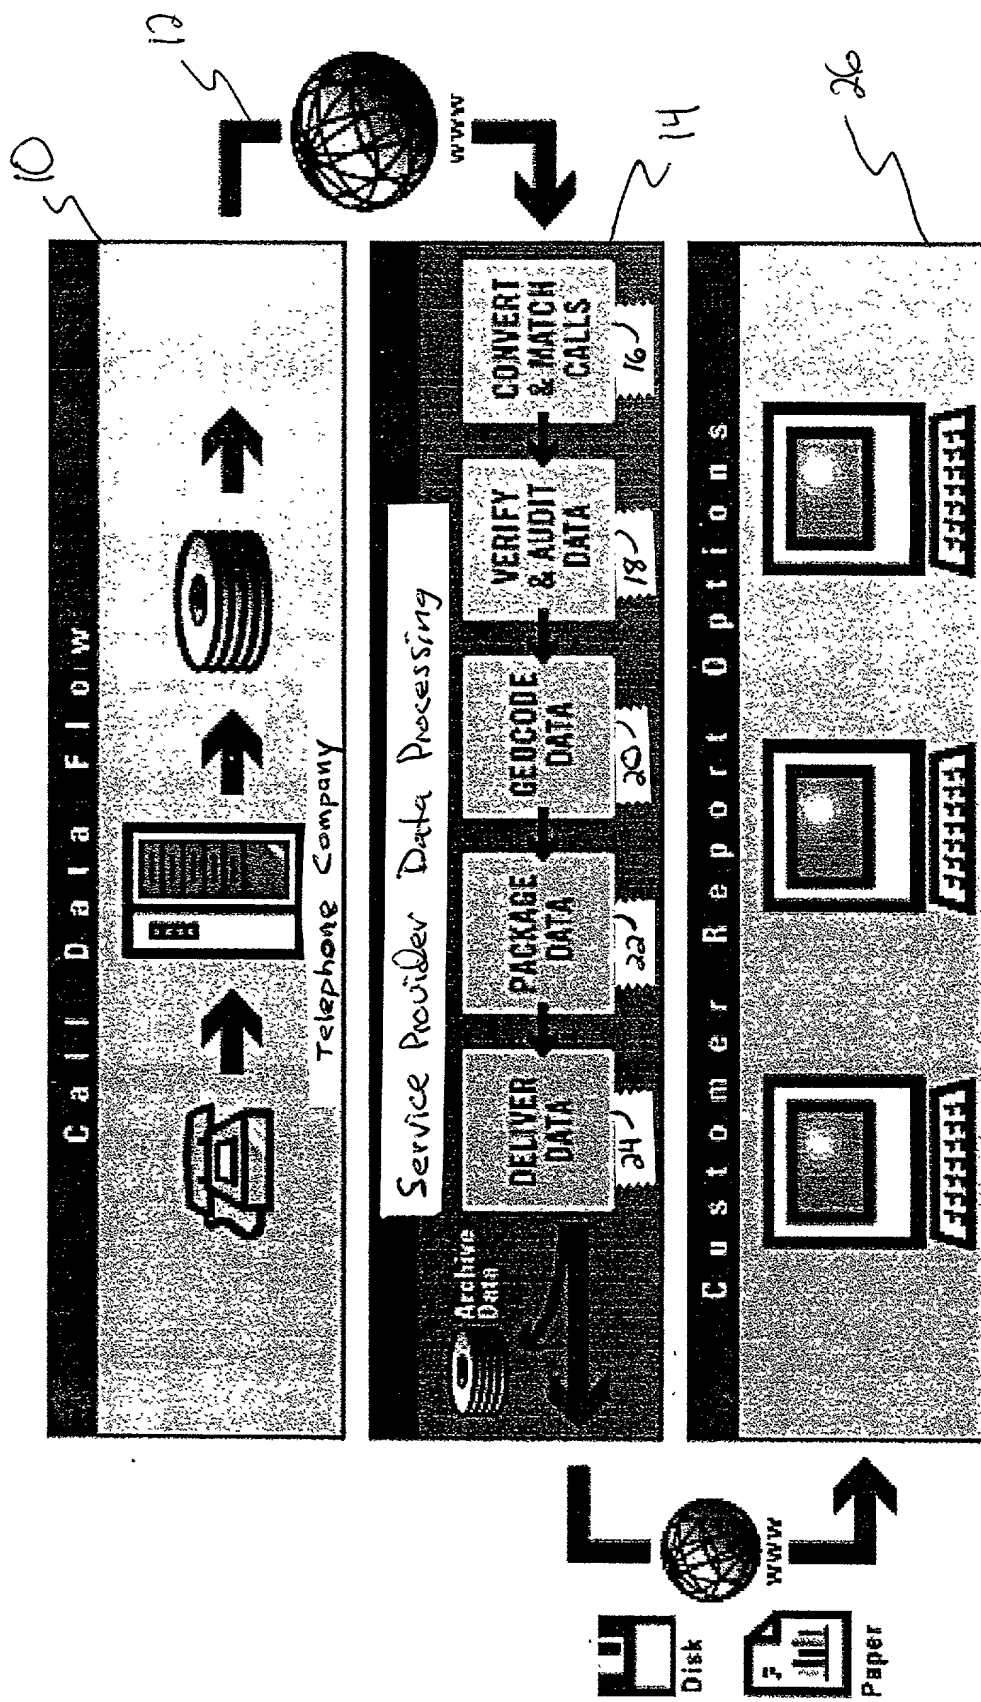


Figure 1

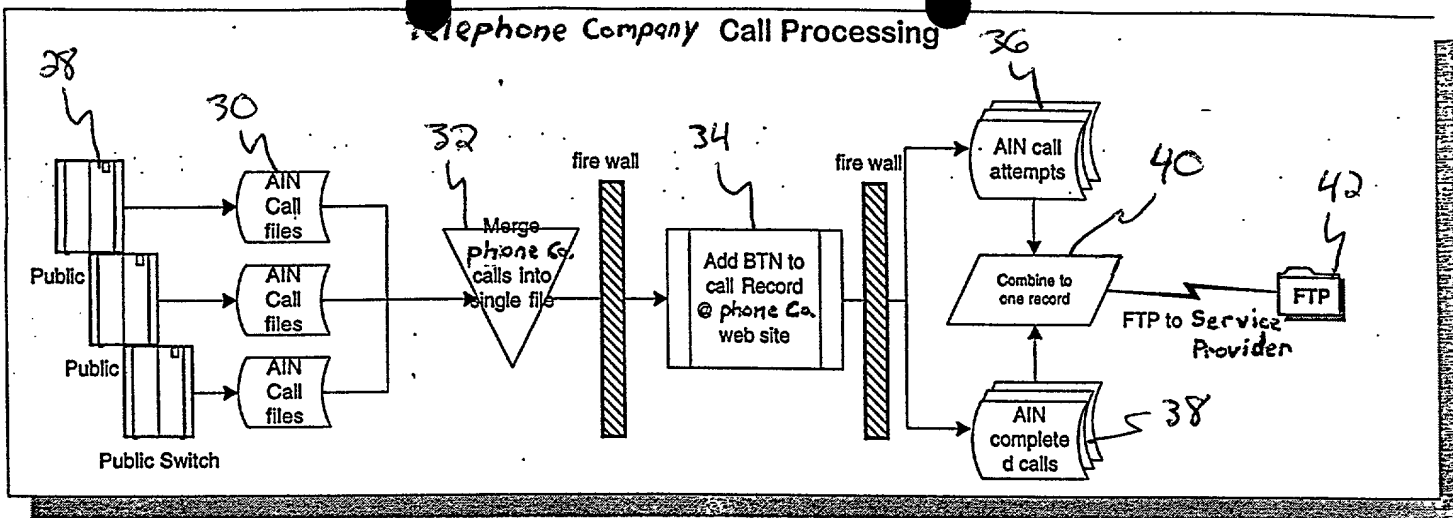


Fig. 2

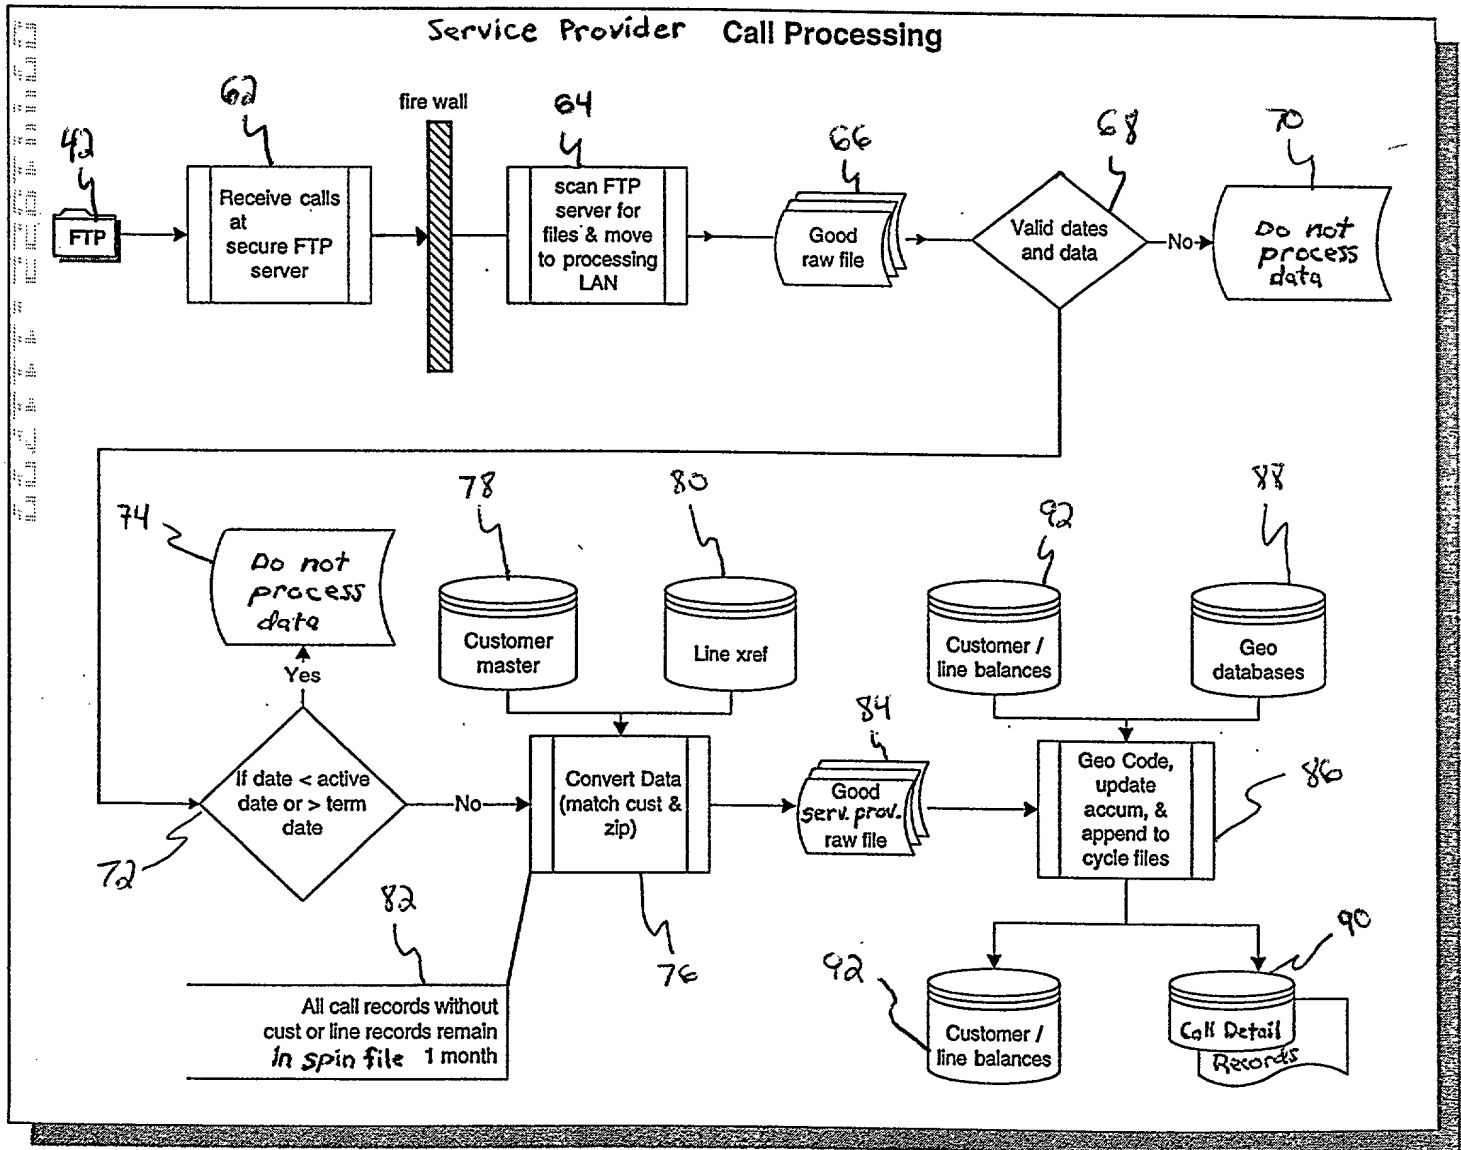


Fig. 4

BBOD-ID	Vencode	Cmt_rate	study type	vendor type	bin	line	time	data	calling party	name	zip	caltype	response type	duration	sec	er code	busycd	exception	busycase
			cmt_rate_c																
8500060516	11			0	105072881861	105072527500	6050700	819981007	105078679181	nr	95592393503	CONTINUE	1	1	40	0	0	0	

# Cycle Processing

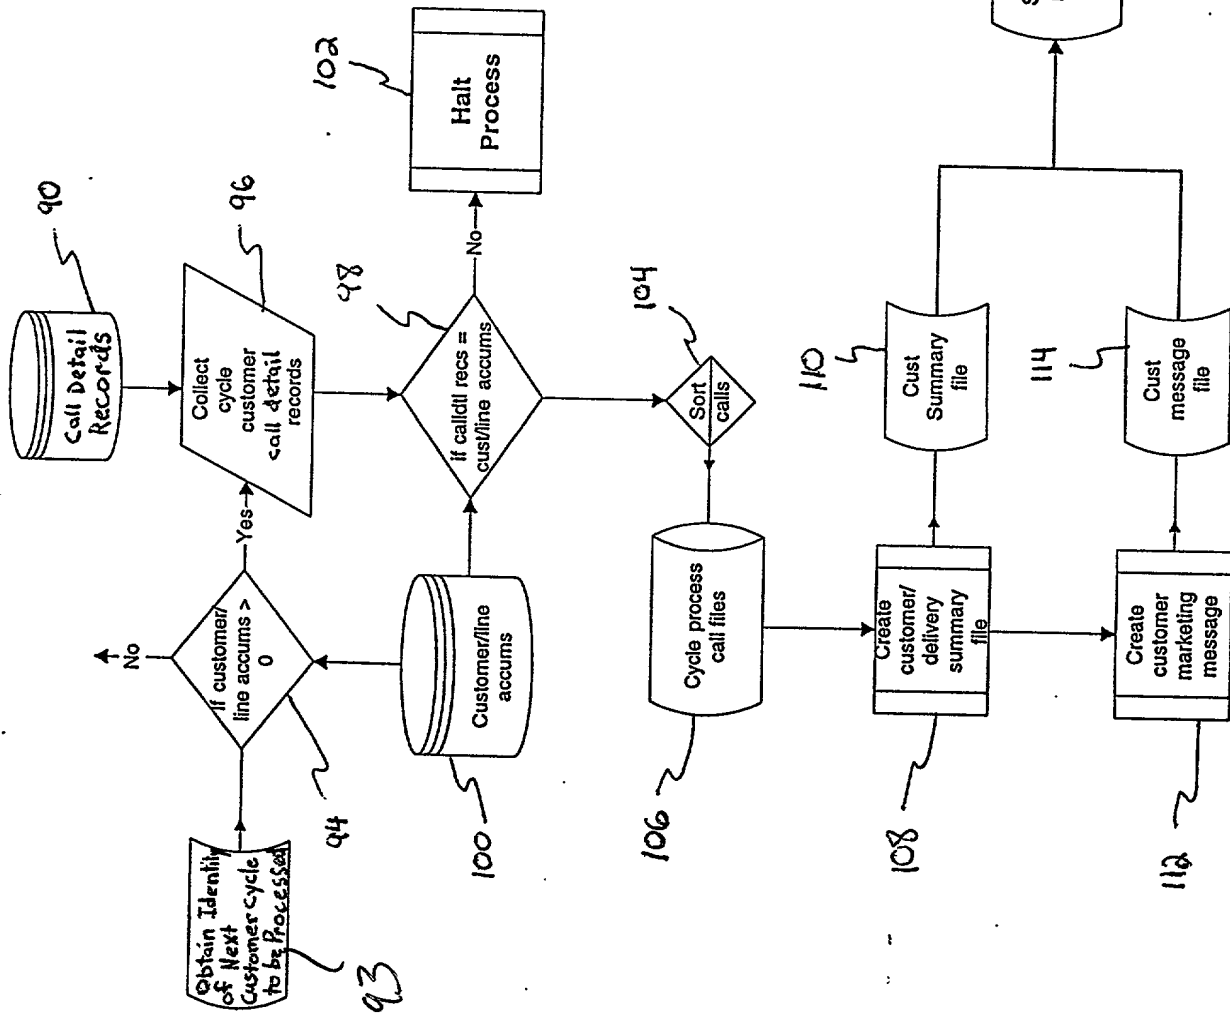


Fig. 5

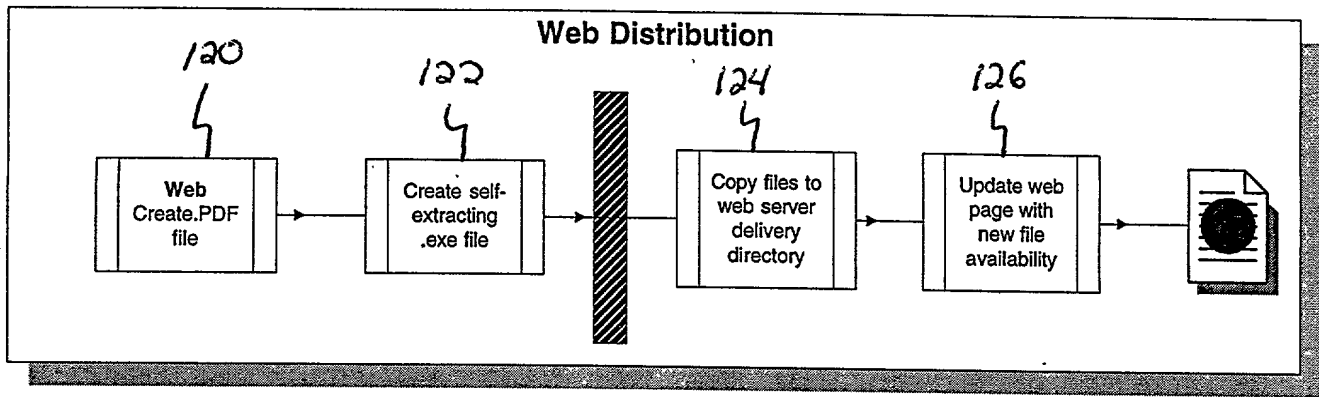


Fig. 6

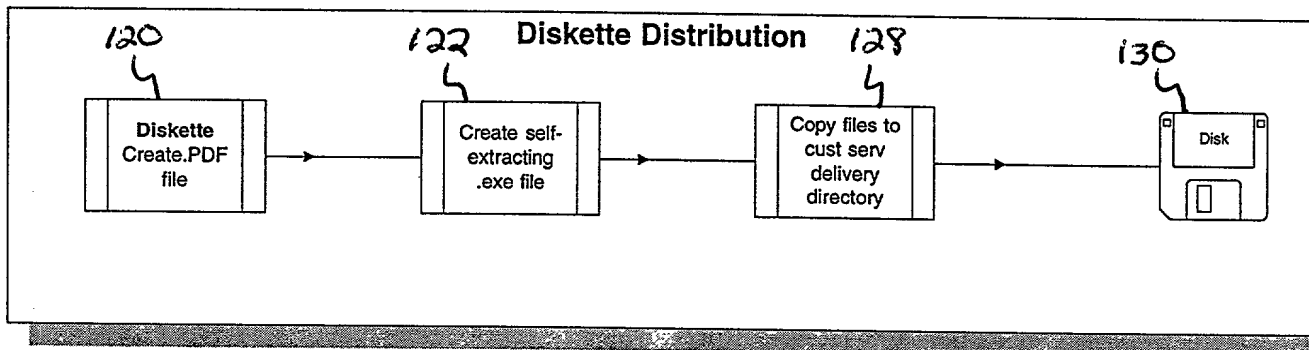


Fig. 7

132 134 136 138 140 142 144 146 148 150 152 154 156

FILE\_ID CDATE CTIME DN CPN CALL\_TYPE CALL\_DISP CALL\_STAT CALL\_DUR XACTION CPN\_NAME POSTALCODE LONGITUDE LATITUDE Q\_BYTES MISC

8/22/98	04:18:15 PM	5135551212	9375787400	I	2	0	0	0	unavailable		-84.193714	39.759868	S	
8/22/98	04:18:36 PM	5135551212	8122562495	I	0	1	260		unavailable		-85.384117	38.733633	S	
8/22/98	04:32:30 PM	5135551212	7405458420	I	0	1	200		unavailable		-82.961757	40.232652	S	
8/22/98	06:39:51 PM	5135551212	1111111111	I	0	1	360		unavailable		0.000000	0.000000	U	
8/23/98	08:55:34 AM	5135551212	5555555555	I	0	1	2730		unavailable		0.000000	0.000000	U	
8/23/98	09:09:07 AM	5135551212	1111111111	O	0	1	240		unavailable		0.000000	0.000000	U	
8/23/98	09:52:46 AM	5135551212	1111111111	I	1	0	0		unavailable		0.000000	0.000000	U	
8/23/98	12:22:41 PM	5135551212	1111111111	I	0	1	230		unavailable		0.000000	0.000000	U	
8/23/98	12:48:28 PM	5135551212	5133901888	I	0	1	110		unavailable		-84.519930	39.102459	S	
8/23/98	01:41:09 PM	5135551212	6066207160	I	0	1	220		unavailable		-84.519930	39.102459	S	
8/23/98	01:53:10 PM	5135551212	9378565488	I	0	1	100		unavailable		-84.364952	39.623529	S	
8/23/98	02:17:51 PM	5135551212	1111111111	I	2	0	0		unavailable		0.000000	0.000000	U	
8/23/98	03:32:58 PM	5135551212	1111111111	I	0	1	50		unavailable		0.000000	0.000000	U	
8/23/98	03:47:34 PM	5135551212	5136598931	I	3	0	0		unavailable		-84.519930	39.102459	S	
8/23/98	05:30:56 PM	5135551212	7658471638	I	0	1	220		unavailable		-84.941571	40.049073	S	
8/23/98	07:16:25 PM	5135551212	9372740967	I	0	1	70		unavailable		-84.225906	39.790287	S	
8/23/98	11:09:44 PM	5135551212	1111111111	I	0	1	2720		unavailable		0.000000	0.000000	U	
8/21/98	09:06:43 AM	5135551212	6066354067	O	0	1	50		unavailable	410019720	-84.419803	38.880692	A	
8/20/98	09:17:34 AM	5135551212	6065895650	I	0	1	4400		unavailable	410058211	-84.722085	39.028344	A	
8/19/98	08:33:35 AM	5135551212	6068697769	I	2	0	0		unavailable	410059751	-84.737297	39.075182	A	
8/19/98	09:05:04 AM	5135551212	6068879769	I	0	1	2180		unavailable	410059751	-84.737297	39.075182	A	
8/19/98	05:22:59 PM	5135551212	6066896779	I	0	1	2850		unavailable	410059751	-84.737297	39.075182	A	
8/21/98	08:55:45 PM	5135551212	6066722444	I	0	1	280		unavailable	410069608	-84.369442	38.787168	A	
8/17/98	11:59:37 AM	5135551212	6069218116	O	0	1	760		unavailable	410111135	-84.530487	39.082738	A	
8/20/98	02:43:02 PM	5135551212	6062198116	I	0	1	3450		unavailable	410111135	-84.530487	39.082738	A	
8/21/98	04:59:46 PM	5135551212	6062198116	I	1	0	0		unavailable	410111135	-84.530487	39.082738	A	
8/18/98	10:21:30 AM	5135551212	6062916544	I	0	1	1610		unavailable	410111160	-84.529001	39.082483	A	
8/19/98	09:26:36 AM	5135551212	6069214564	I	0	1	710		unavailable	410111160	-84.529001	39.082483	A	

40

Fig. 8

## Geocoding logic hierarchy

Criterion				Value
IF	<u>CASE 1</u>	9 digit zip exists in zip field	& exists in -> 9 digit zip DB	A
	otherwise	9 digit zip (1st 5 digits)	exists in -> 5 digit zip DB	B
	otherwise	9 digit zip (1st 3 digits)	exists in -> 3 digit zip DB	C
	otherwise	npanxx of calling # field	exists in -> npanxx DB	D
	otherwise	npa of calling # field	exists in -> nap DB	E
	otherwise	use special value indicating unknown origin		F
otherwise, IF	<u>CASE 2</u>	6, 7, or 8 digit zip exists in zip field (bad data)		
	AND	npanxx of calling # field	exists in -> npanxx DB	G
	otherwise	npa of calling # field	exists in -> nap DB	H
	otherwise	use special value indicating unknown origin		I
otherwise, IF	<u>CASE 3</u>	5 digit zip exists in zip field	& exists in -> 5 digit zip DB	J
	otherwise	5 digit zip (1st 3 digits)	exists in -> 3 digit zip DB	K
	otherwise	npanxx of calling # field	exists in -> npanxx DB	L
	otherwise	npa of calling # field	exists in -> nap DB	M
	otherwise	use special value indicating unknown origin		N
	<u>CASE 4</u>	< 5 digit zip exists in zip field (bad data)		
otherwise, IF	AND	npanxx of calling # field	exists in -> npanxx DB	P
	otherwise	npa of calling # field	exists in -> nap DB	Q
	otherwise	use special value indicating unknown origin		R
otherwise, IF	<u>CASE 5</u>	0 or null exists in zip field (no zip)		
	AND	npanxx of calling # field	exists in -> npanxx DB	S
	otherwise	npa of calling # field	exists in -> nap DB	T
	otherwise	use special value indicating unknown origin		U

Table 1



**Report Selection : Demonstration Data Set**

**Quick Summary**

1116	Answered Calls
100	Abandoned Calls
85	Busy Calls
114	Other Calls
1415	TOTAL Calls

**Report Period**

Start Date: 08/10/98    End Date: 08/16/98    Days in Period: 7

**Change Dates**

**Report Set Selection**

Report Collection 10

Active Report Set

**Customize Report Set**

**View Reports**

**EXIT**

**158** → (points to Quick Summary section)

**160** → (points to Report Period section)

**162** → (points to Change Dates button)

**166** → (points to Customize Report Set button)

**164** → (points to View Reports button)

**176** → (points to EXIT button)

Appendix A

August 1998						
Mon	Tue	Wed	Thu	Fri	Sat	Sun
27	28	29	30	31	1	2
3	4	5	6	7	8	9
10	11	12	* ACTIVE *		14	15
			Available			16
17	18	19	20	21	22	23
			Available			
24	25	26	27	28	29	30
31	1	2	3	4	5	6

Appendix B

**Customize Report Sets**

Report Collection 10

Report Sets:    **172**

Reports in Set:

**Incoming & Outgoing** **174**

☐ Call Types ☐ Select Reports ☐ Select Telephones

**Weekly View** **Monthly View** **Callers/Areas** **Multi-Location** **Trends**

	TABLE	GRAPH	MAP
<b>Summary</b>			
Summary	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Call Totals	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Usage</b>			
Call Duration Distribution	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Total Call Duration	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Average Call Duration	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Call Types</b>			
Call Type By Day (weekly Total)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Call Type By Hour (daily Detail)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Call Type By Hour (weekly Total)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Answered Totals	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Busy Totals	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Abandoned Totals	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Other Totals	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**168** **170**

Appendix C

October 26, 1998 - November 1, 1998

## New ZIP Codes


New ZIP codes discovered in the current date range ranked by answered call count.

Zip Code	State	Call Count	First Call Date & Time	Last Call Date & Time	Total Duration
55402	MN	11	10/26/98 11:07:00 AM	10/30/98 02:46:00 PM	0:27:40.0
55416	MN	11	10/26/98 12:11:00 PM	10/29/98 02:37:00 PM	0:11:25.0
84111	UT	6	10/26/98 09:56:00 AM	10/28/98 02:15:00 PM	0:31:12.0
55343	MN	6	10/26/98 01:38:00 PM	10/30/98 11:57:00 AM	0:14:28.0
56304	MN	5	10/26/98 06:43:00 PM	10/28/98 05:47:00 PM	0:44:51.0
85012	AZ	4	10/27/98 05:15:00 PM	10/29/98 05:48:00 PM	0:06:14.0
55347	MN	4	10/26/98 06:51:00 AM	10/28/98 02:43:00 PM	0:02:31.0
98191	WA	3	10/26/98 10:34:00 AM	10/29/98 06:09:00 PM	0:16:07.0
55104	MN	3	10/26/98 11:48:00 AM	10/27/98 11:30:00 AM	0:03:12.0
55415	MN	3	10/27/98 05:34:00 PM	10/30/98 01:03:00 PM	0:02:17.0
80132	CO	3	10/26/98 12:57:00 PM	10/26/98 02:57:00 PM	0:01:24.0
55425	MN	2	10/26/98 04:25:00 PM	10/28/98 03:56:00 PM	0:06:05.0
98188	WA	2	10/28/98 01:26:00 PM	10/28/98 01:29:00 PM	0:05:34.0
83204	ID	2	10/30/98 11:09:00 AM	10/30/98 11:09:00 AM	0:04:48.0
55431	MN	2	10/26/98 03:59:00 PM	10/30/98 09:44:00 AM	0:03:39.0
55124	MN	2	10/27/98 02:08:00 PM	10/27/98 02:10:00 PM	0:03:07.0
55364	MN	2	10/27/98 03:50:00 PM	10/27/98 03:50:00 PM	0:00:46.0
55437	MN	2	10/28/98 05:11:00 PM	10/29/98 03:25:00 PM	0:00:29.0
55305	MN	1	10/27/98 03:20:00 PM	10/27/98 03:20:00 PM	0:09:54.0
85283	AZ	1	10/28/98 05:44:00 PM	10/28/98 05:44:00 PM	0:07:33.0
85024	AZ	1	10/27/98 05:41:00 PM	10/27/98 05:41:00 PM	0:04:06.0
80202	CO	1	10/30/98 01:36:00 PM	10/30/98 01:36:00 PM	0:03:35.0
55118	MN	1	10/30/98 08:37:00 AM	10/30/98 08:37:00 AM	0:03:17.0
97401	OR	1	10/29/98 02:13:00 PM	10/29/98 02:13:00 PM	0:02:32.0
80206	CO	1	10/28/98 10:09:00 AM	10/28/98 10:09:00 AM	0:02:02.0
68144	NE	1	10/28/98 03:14:00 PM	10/28/98 03:14:00 PM	0:01:51.0
55391	MN	1	10/28/98 05:36:00 PM	10/28/98 05:36:00 PM	0:01:48.0
55011	MN	1	10/26/98 02:30:00 PM	10/26/98 02:30:00 PM	0:01:47.0
85255	AZ	1	10/27/98 05:55:00 PM	10/27/98 05:55:00 PM	0:01:22.0
99216	WA	1	10/30/98 11:29:00 AM	10/30/98 11:29:00 AM	0:01:11.0
97204	OR	1	10/26/98 02:08:00 PM	10/26/98 02:08:00 PM	0:00:57.0
55113	MN	1	10/26/98 03:59:00 PM	10/26/98 03:59:00 PM	0:00:43.0
68102	NE	1	10/26/98 12:05:00 PM	10/26/98 12:05:00 PM	0:00:41.0
98004	WA	1	10/30/98 03:32:00 PM	10/30/98 03:32:00 PM	0:00:41.0
55422	MN	1	10/26/98 11:12:00 AM	10/26/98 11:12:00 AM	0:00:20.0
55102	MN	1	10/27/98 11:47:00 AM	10/27/98 11:47:00 AM	0:00:07.0
55427	MN	1	10/26/98 04:09:00 PM	10/26/98 04:09:00 PM	0:00:06.0
55404	MN	1	10/26/98 04:26:00 PM	10/26/98 04:26:00 PM	0:00:05.0
55420	MN	1	10/26/98 10:05:00 AM	10/26/98 10:05:00 AM	0:00:03.0

Appendix D

# Call Type by Hour Monday, 10/26/98

ANSWERED  
BUSY  
UNANSWERED  
UNKNOWN

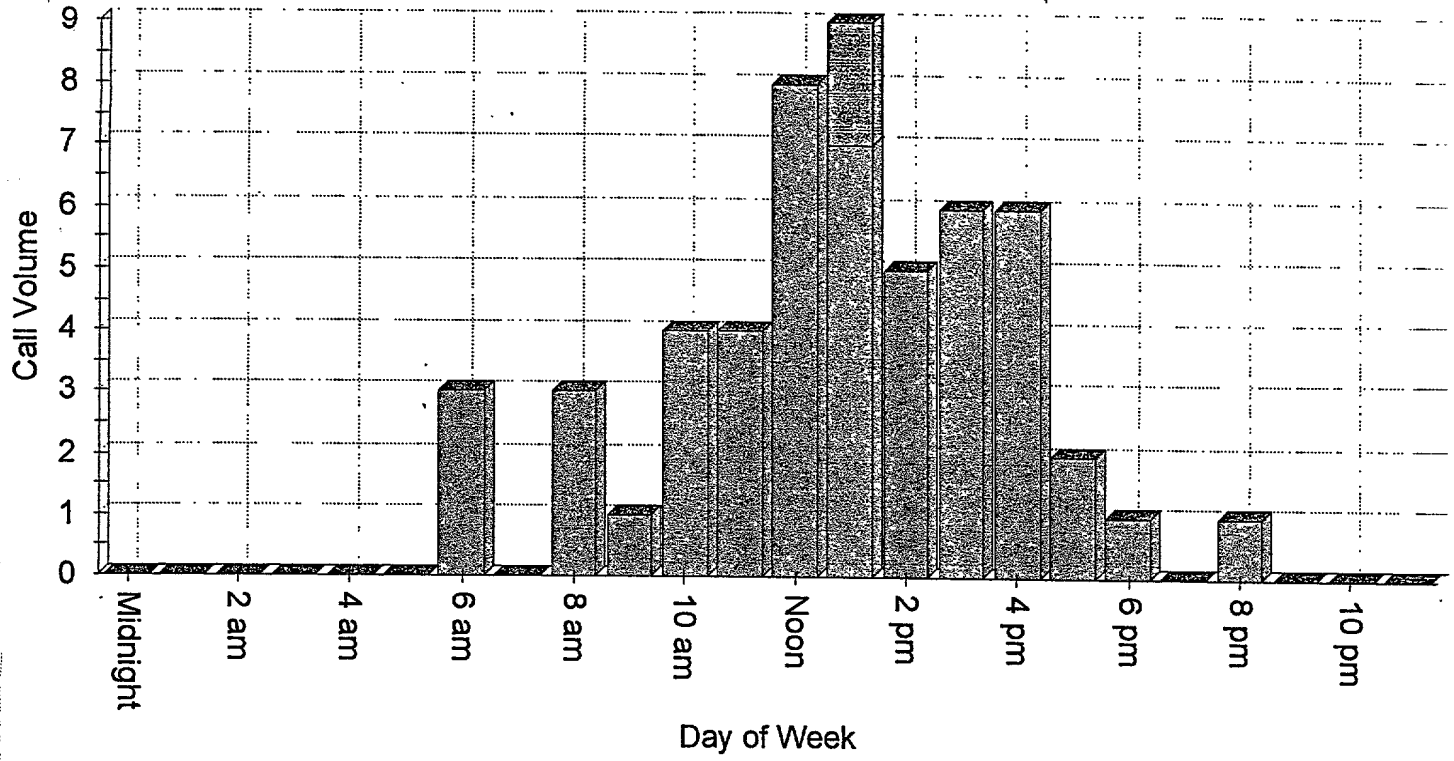

Appendix E

## Legend: Colors & Symbols


## Legend: Colors & Symbols

■ 77805306557 to 82609835915  
 ■ 82609835915 to 87414365272  
 ■ 87414365272 to 92218994629  
 ■ 92218994629 to 97023423986  
 ■ 97023423986 to 101827953343  
 ■ 101827953343 to 10663212700  
 ■ 106632482700 to 11643701857  
 ■ 111437012057 to 116241541414  
 ■ 116241541414 to 121046070771  
 ■ 121046070771 to 125850600128

Map Features  
 Freeways  
 5 Digit ZIP's


Scale

## Appendix F

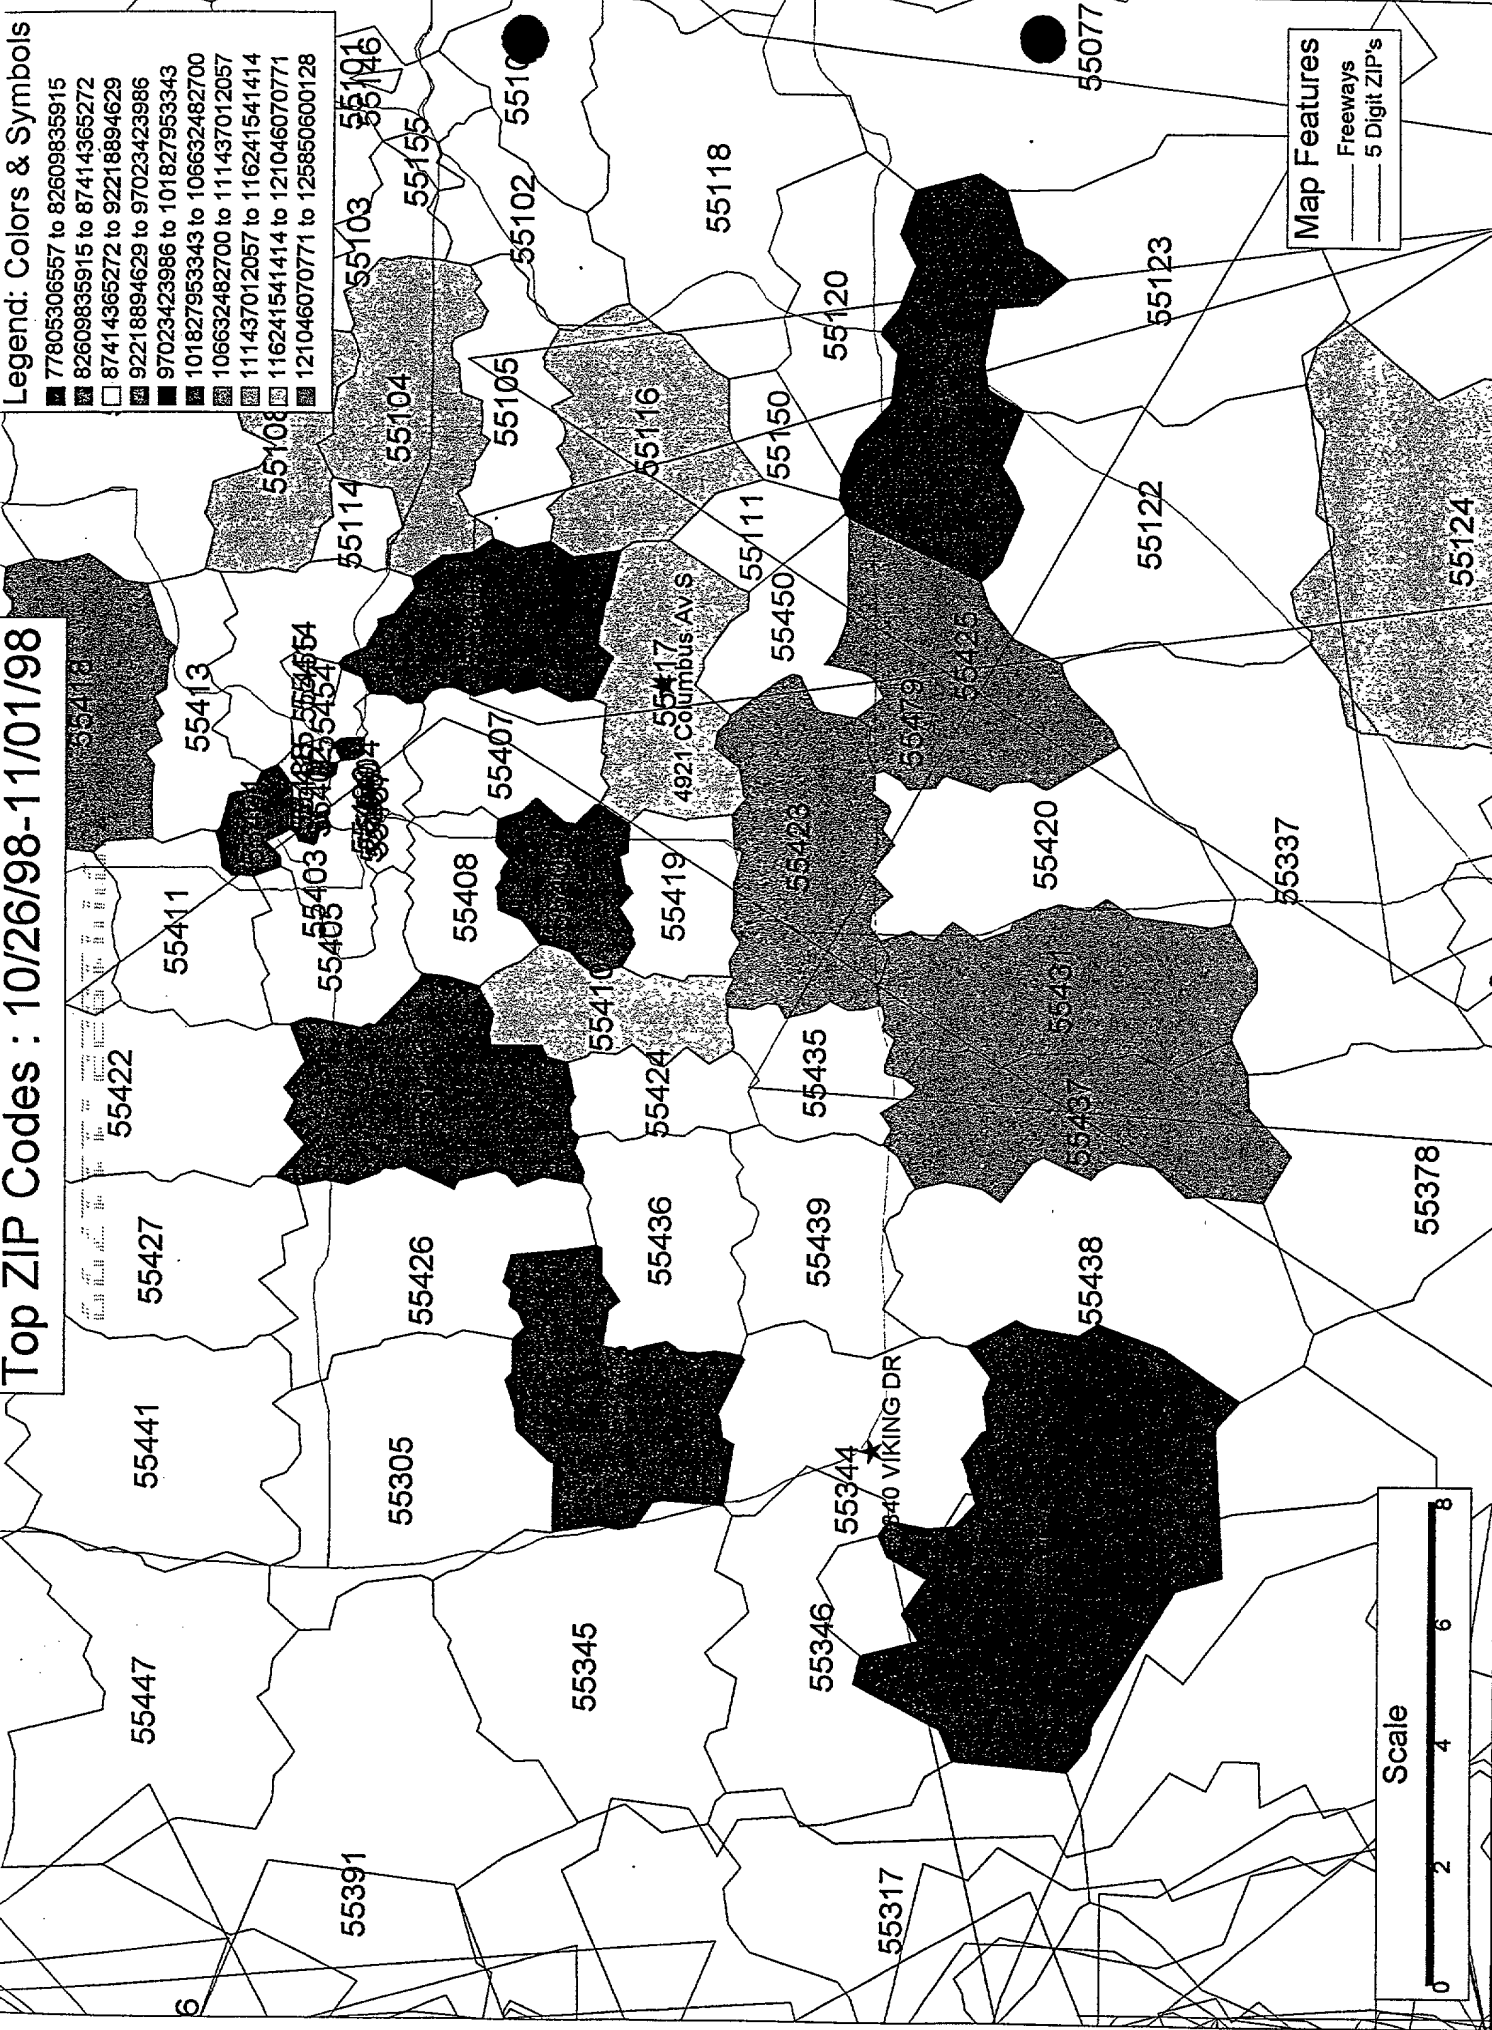

Legend: Colors & Symbols

Monday	■	Answered
Tuesday	■	Busy
Wednesday	■	No Answer
Thursday	■	Unknown
Friday	■	
Saturday	■	
Sunday	■	

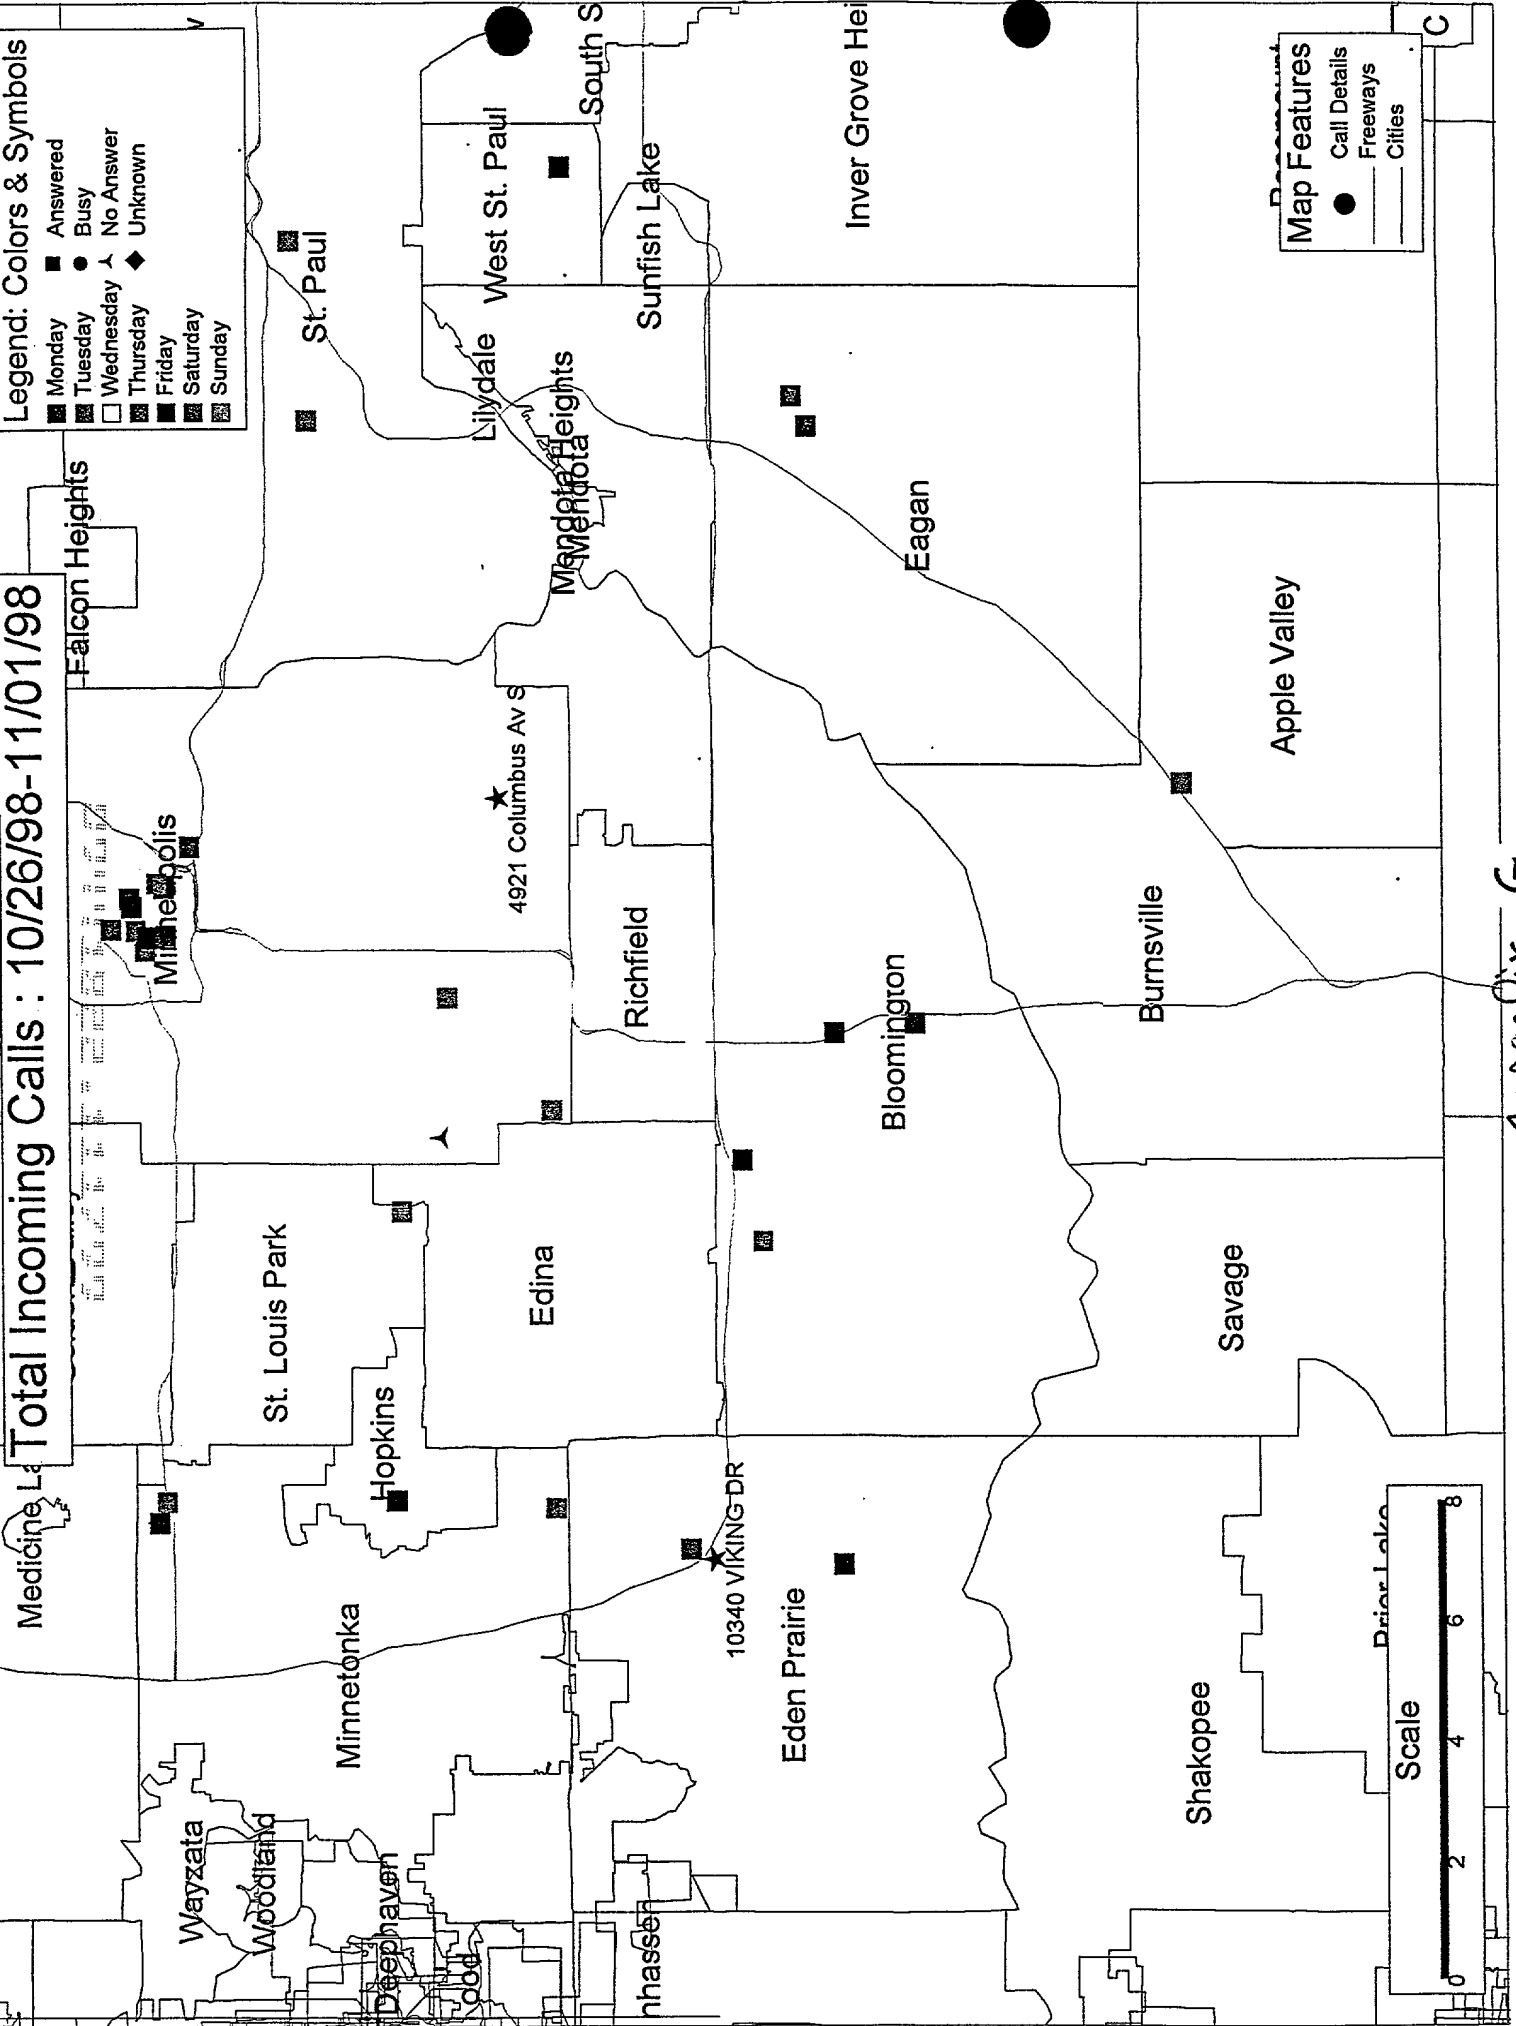

COMBINED DECLARATION AND  
POWER OF ATTORNEY  
IN ORIGINAL APPLICATION

Attorney Docket No.

021.12-0001

SPECIFICATION AND INVENTORSHIP IDENTIFICATION

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and joint inventor of the subject matter which is claimed, and for which a patent is sought, on the invention entitled SYSTEM AND METHOD FOR REPORTING CALLS the specification of which,

(check one) X is attached hereto.

— was filed on as Appln. Serial No. .

— and was amended on .

— was described and claimed in PCT International Application  
No. filed on and as amended under PCT Article  
19 on .

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is known to me to be material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56.

PRIORITY CLAIM (35 USC § 119)

I claim foreign priority benefits under Title 35, United States Code, § 119(a-d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Number	Country	Day/Month/Year Filed	Priority Claimed
_____	_____	_____	Yes____ No____
_____	_____	_____	Yes____ No____

Prior Provisional Application(s)

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States Provisional Application(s) listed below:

Number	Day/Month/Year Filed
60/108,731	17 November 1998
_____	_____



**PRIORITY CLAIM (35 USC § 120)**

I claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below. Insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code § 112, I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in Title 37 Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Appln. Ser. No.	U.S. Serial No. (if any under PCT)	Filing Date	Status
_____	_____	_____	_____
_____	_____	_____	_____

**DECLARATION**

I declare that all statements made herein that are of my own knowledge are true and that all statements that are made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY**

I appoint the following attorneys and agents to prosecute the patent application identified above and to transact all business in the Patent and Trademark Office connected therewith, including full power of association, substitution and revocation: Judson K. Champlin, Reg. No. 34,797; Joseph R. Kelly, Reg. No. 34,847; Nickolas E. Westman, Reg. No. 20,147; Steven M. Koehler, Reg. No. 36,188; David D. Brush, Reg. No. 34,557; John D. Veldhuis-Kroeze, Reg. No. 38,354; Deirdre Megley Kvale, Reg. No. 35,612; Theodore M. Magee, Reg. No. 39,758; Peter S. Dardi, Reg. No. 39,650; Christopher R. Christenson, Reg. No. 42,413; John A. Wiberg, Reg. No. 44,401; and Brian D. Kaul, Reg. No. 41,885.

I ratify all prior actions taken by Westman, Champlin & Kelly, P.A. or the attorneys and agents mentioned above in connection with the prosecution of the above-mentioned patent application.

**DESIGNATION OF CORRESPONDENCE ADDRESS**

Please address all correspondence and telephone calls to Joseph R. Kelly in care of:

WESTMAN, CHAMPLIN & KELLY, P.A.  
Suite 1600 - International Centre  
900 Second Avenue South  
Minneapolis, Minnesota 55402-3319  
Phone: (612) 334-3222  
Fax: (612) 334-3312

Inventor:   
(Signature)

Date: 11/16/99

Inventor: Kirk C. Danzl  
(Printed Name)

Residence: Brooklyn Park, Minnesota, 55444 Citizenship: U.S.A.

P.O. Address: 2517 98th Avenue No.

(Signature)

11/16/1959

Inventor: Andrew Armstrong

Residence: Minneapolis, Minnesota, 55419

Citizenship: U.S.A.

P.O. Address: 5816 Emerson Avenue South

Inventor:

Date:

Inventor: John Borowicz

(Printed Name)

Residence: Minnetrista, Minnesota 55364

Citizenship: U.S.A.

P.O. Address: 655 Trails End Road